

BD Drill

DTH Drill Pipes

and Adaptors


www.bddrill.com.au / www.bddrillgf.com



Choosing the right drill string

The main features of a world class drill string are accuracy, durability and reliability. Black Diamond Drilling Drill Pipes are manufactured using cutting edge technology from the highest quality Swedish steel. Continual research and development has resulted in a high quality, precision product that is relied upon by many leading mining companies. Friction welded joints

Selecting the right drill pipe for the application is crucial to maximising returns and reducing costs. The Pipe diameter should be as close to the hammer's outside diameter to ensure optimum flushing.

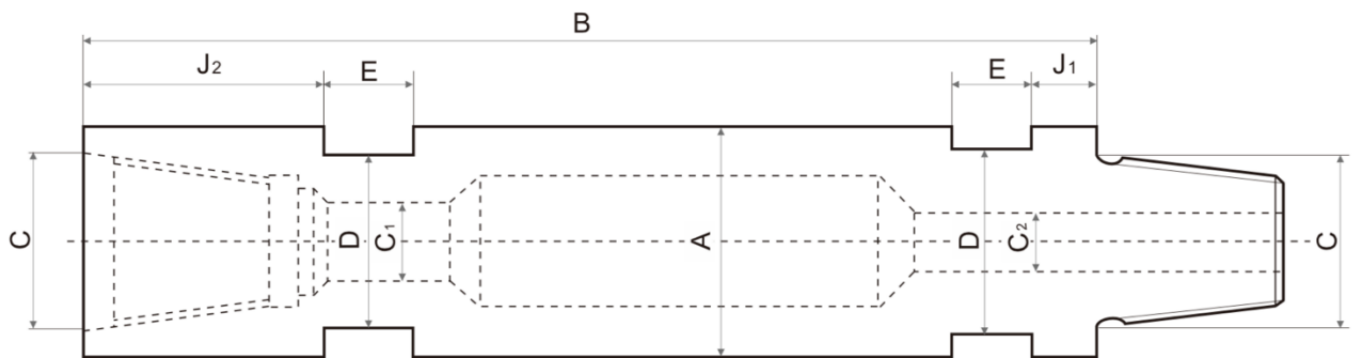

DTH Drill Rods (NO wrench flats)


Part Number	Diameter (A)		Thread Pin/Box (C)	Wall thickness		Length (B)		Wrench flats (E)	Weight		Compatibility
	inch	mm		inch	mm	feet	m		lbs	kg	
ROD-DTH-76/6000-REG238	3	76	2 3/8" API REG	0.248	6,3	19.68	6	No Wrench flats	145	66	89000871
ROD-DTH-76/5000-REG238	3	76	2 3/8" API REG	0.248	6,3	16.4	5	No Wrench flats	128	58	89000444
ROD-DTH-76/4000-REG238	3	76	2 3/8" API REG	0.248	6,3	13.12	4	No Wrench flats	106	48	89009398
ROD-DTH-89/6000-REG238	3.5	89	2 3/8" API REG	0.346	8,8	19.68	6	No Wrench flats	279	127	89000999
ROD-DTH-89/6000-REG238	3.5	89	2 3/8" API REG	0.248	6,3	19.68	6	No Wrench flats	183	83	89009356
ROD-DTH-89/5000-REG238	3.5	89	2 3/8" API REG	0.248	6,3	16.4	5	No Wrench flats	165	75	89000442
ROD-DTH-89/4000-REG238	3.5	89	2 3/8" API REG	0.248	6,3	13.12	4	No Wrench flats	132	60	89000445
ROD-DTH-102/6000-REG278	4	102	2 7/8" API REG	0.248	6,3	19.68	6	No Wrench flats	232	105,3	89000698
ROD-DTH-102/5000-REG278	4	102	2 7/8" API REG	0.248	6,3	16.4	5	No Wrench flats	197	89,6	89000681
ROD-DTH-102/4000-REG278	4	102	2 7/8" API REG	0.248	6,3	13.12	4	No Wrench flats	152	69	89000648
ROD-DTH-114/6000-REG312	4.5	114	3 1/2" API REG	0.346	8,8	19.68	6	No Wrench flats	350	159	89000950
ROD-DTH-114/6000-REG312	4.5	114	3 1/2" API REG	0.248	6,3	19.68	6	No Wrench flats	254	115,3	89009355
ROD-DTH-114/5000-REG312	4.5	114	3 1/2" API REG	0.248	6,3	16.4	5	No Wrench flats	239	108,5	89001303
ROD-DTH-140/6000-REG412	5.5	140	4 1/2" API REG	0.346	8,8	19.68	6	No Wrench flats	441	200,5	89000982
ROD-DTH-140/5000-REG412	5.5	140	4 1/2" API REG	0.346	8,8	16.4	5	No Wrench flats	381	173,4	89001415

DTH Drill Rods (with wrench flats)

Part Number	Diameter (A)		Thread Pin/Box (C)	Wall thickness		Length (B)		Wrench flats (E)			Weight		Compatibility
	inch	mm		inch	mm	feet	m	inch	mm	Flat location	lbs	kg	
ROD-DTH-51/1000-RD406	2	51	RD 40-6	0.2	5	3.3	1,0	1.61	41	Both ends	15.9	7,2	89010255
ROD-DTH-51/1500-RD406	2	51	RD 40-6	0.2	5	4.9	1,5	1.61	41	Both ends	23.1	10,5	89010253
ROD-DTH-51/3000-RD406	2	51	RD 40-6	0.2	5	9.8	3,0	1.61	41	Both ends	39.7	18,0	89010251
ROD-DTH-63/1000-RD506	2.5	63	RD 50-6	0.2	5	3.3	1,0	1.97	50	Both ends	16.5	7,5	89010256
ROD-DTH-63/1500-RD506	2.5	63	RD 50-6	0.2	5	4.9	1,5	1.97	50	Both ends	24.3	11,0	89010254
ROD-DTH-63/3000-RD506	2.5	63	RD 50-6	0.2	5	9.8	3,0	1.97	50	Both ends	52.9	24,0	89010252
ROD-DTH-70/1200-RD506	2.75	70	RD 50-6	0.16	4	3.9	1,2	2.16	55	Both ends	23.1	10,5	89001311
ROD-DTH-70/1500-RD506	2.75	70	RD 50-6	0.16	4	4.9	1,5	2.16	55	Both ends	28	12,7	89009166
ROD-DTH-70/3000-RD506	2.75	70	RD 50-6	0.157	4,0	9.8	3	2.16	55	Both ends	51	23,2	89009467
ROD-DTH-76/6000-REG238	3	76	2 3/8" API REG	0.248	6,3	20	6,09	2.55	65	Both ends	158	72	89001335
ROD-DTH-76/3000-REG238	3	76	2 3/8" API REG	0.248	6,3	9.8	3	2.55	65	Both ends	79	36	89009348
ROD-DTH-76/3000-REG238	3	76	2 3/8" API REG	0.157	4,0	9.8	3	2.55	65	Both ends	55	25	89009470
ROD-DTH-76/3000-REG238	3	76	2 3/8" API REG	0.157	4,0	9.8	3	2.55	65	Both ends	53	24	89010061
ROD-DTH-76/2000-REG238	3	76	2 3/8" API REG	0.248	6,3	6.6	2	2.55	65	Both ends	55	25	89009347
ROD-DTH-76/2000-REG238	3	76	2 3/8" API REG	0.157	4,0	6.6	2	2.55	65	Both ends	40	18	89009489
ROD-DTH-76/1500-REG238	3	76	2 3/8" API REG	0.248	6,3	4.9	1,5	2.55	65	Both ends	44	20	89009346
ROD-DTH-76/1500-REG238	3	76	2 3/8" API REG	0.157	4,0	4.9	1,5	2.55	65	Both ends	33	15	89009468
ROD-DTH-76/1000-REG238	3	76	2 3/8" API REG	0.248	6,3	3.3	1	2.55	65	Both ends	31	14	89009345
ROD-DTH-76/1000-REG238	3	76	2 3/8" API REG	0.157	4,0	3.3	1	2.55	65	Both ends	24	11	89009469
ROD-DTH-76/3000-RD50	3	76	RD 50-6	0.157	4,0	9.8	3	2.55	65	Both ends	57	26	89009176
ROD-DTH-89/3000-REG238	3.5	89	2 3/8" API REG	0.248	6,3	9.8	3	2.55	65	Both ends	95	43	89009473
ROD-DTH-89/3000-REG238	3.5	89	2 3/8" API REG	0.157	4,0	9.8	3	2.55	65	Both ends	68	31	89009472
ROD-DTH-89/2000-REG238	3.5	89	2 3/8" API REG	0.248	6,3	6.6	2	2.55	65	Both ends	66	30	89009210
ROD-DTH-89/2000-REG238	3.5	89	2 3/8" API REG	0.157	4,0	6.6	2	2.55	65	Both ends	51	23	89009490
ROD-DTH-89/1800-REG238	3.5	89	2 3/8" API REG	0.248	6,3	6	1,8	2.55	65	Both ends	62	28	89009448
ROD-DTH-89/1500-REG238	3.5	89	2 3/8" API REG	0.248	6,3	4.9	1,5	2.55	65	Both ends	53	24	89009479
ROD-DTH-89/1500-REG238	3.5	89	2 3/8" API REG	0.157	4,0	4.9	1,5	2.55	65	Both ends	40	18	89009471
ROD-DTH-89/1000-REG238	3.5	89	2 3/8" API REG	0.248	6,3	3.3	1	2.55	65	Both ends	37	17	89009209
ROD-DTH-89/1000-REG238	3.5	89	2 3/8" API REG	0.157	4,0	3.3	1	2.55	65	Both ends	31	14	89009194
ROD-DTH-89/1800-LT275	3.5	89	LT 275	0.248	6,3	6	1,8	2.55	65	Both ends	62	28	89000798
ROD-DTH-89/6000-IF238	3.5	89	2 3/8" API IF	0.248	6,3	19.68	6	2.55	65	Both ends	180	82	89009216
ROD-DTH-89/3000-IF238	3.5	89	2 3/8" API IF	0.248	6,3	9.8	3	2.55	65	Both ends	95	43	89009214
ROD-DTH-102/3000-REG278	4	102	2 7/8" API REG	0.248	6,3	9.8	3	3	75	Both ends	114	52	89009423
ROD-DTH-114/6000-REG312	4.5	114	3½" API REG	0.346	8,8	19.68	6	3.74	95	Both ends	295	134	89009370
ROD-DTH-114/6000-REG312	4.5	114	3½" API REG	0.248	6,3	19.68	6	3.74	95	Both ends	244	111	89009477
ROD-DTH-114/5000-REG312	4.5	114	3½" API REG	0.248	6,3	16.4	5	3.74	95	Both ends	198	90	89000994
ROD-DTH-114/3000-REG312	4.5	114	3½" API REG	0.248	6,3	9.8	3	3.74	95	Both ends	132	60	89009476
ROD-DTH-114/3000-REG312	4.5	114	3½" API REG	0.157	4,0	9.8	3	3.74	95	Both ends	101	46	89009446
ROD-DTH-114/2000-REG312	4.5	114	3½" API REG	0.248	6,3	6.6	2	3.74	95	Both ends	97	44	89009230
ROD-DTH-114/1500-REG312	4.5	114	3½" API REG	0.248	6,3	4.9	1,5	3.74	95	Both ends	77	35	89009475
ROD-DTH-114/1000-REG312	4.5	114	3½" API REG	0.248	6,3	3.3	1	3.74	95	Both ends	59	27	89009229
ROD-DTH-114/1500-LT425	5.25	133	LT 425	0,197	5,0	4.9	1,5			Both ends	73	33	89000954
ROD-DTH-114/3000-REG412	5.5	140	4½" API REG	0,346	8,8	9.8	3	4.5	114	Both ends	224	102	89009536


DTH Adaptors

Box to Box – Female to Female

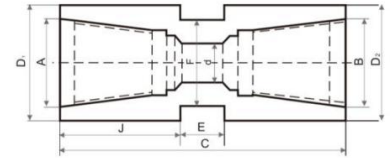

Product code	Diameter (D1, D2)		Length ss (C)		Configuration			Flats Across (F)		Weight		Compatibility
	inch	mm	inch	mm	Type	Box (A)	Box (B)	inch	mm	lbs	kg	
SUB-BREG238BRD506-76/SSL140	3	76	5.5	140	Box/Box	2 3/8" API Reg	RD 50-6	2.56	65	9	4	89009257
SUB-BREG238BREG238-76/SSL200	3	76	7.9	200	Box/Box	2 3/8" API Reg	2 3/8" API Reg	2.56	65	10	4.5	89009261
SUB-BREG238BREG238-89/SSL200	3.5	89	7.9	200	Box/Box	2 3/8" API Reg	2 3/8" API Reg	2.56	65	13	6	89009482
SUB-BREG238BIF238-89/SSL508	3.5	89	20	508	Box/Box	2 3/8" API Reg	2 3/8" IF	2.75	70	37	17	58135732
SUB-BRD70BREG312-114/SSL178	4.5	114	7	178	Box/Box	RD 70-4	3 1/2" API Reg	3.75	95	18	8	89009259
SUB-BREG278BREG312-114/SSL254	4.5	114	10	254	Box/Box	2 7/8" API Reg	3 1/2" API Reg	4	102	22	10	56934789
SUB-BREG238BREG312-114/SSL210	4.5	114	8.25	210	Box/Box	2 3/8" API Reg	3 1/2" API Reg	3.75	95	22	10	89009483
SUB-BREG312BREG312-121/SSL305	4.75	121	12	305	Box/Box	3 1/2" API Reg	3 1/2" API Reg	4	102	40	18	56930563
SUB-BREG412BREG412-140/SSL305	5.5	140	12	305	Box/Box	4 1/2" API Reg	4 1/2" API Reg	5	127	51	23	57730756
SUB-BREG412BIF278-140/SSL610	5.5	140	24	610	Box/Box	4 1/2" API Reg	2 7/8" IF	No	No	64	29	58135856

Box to Pin – Female to Male



Product code	Diameter (D1, D2)		Length ss (C)		Configuration			Flats across (F)		Weight		Compatibility
	inch	mm	inch	mm	Type	Box (A)	Pin (B)	inch	mm	lbs	kg	
SUB-BRD406PRD506-62/SSL99	2.5	62	3.9	99	Box/Pin	RD 40-6	RD 50-6	2.56	65	6.6	3,0	89010257
SUB-BREG238PZ2-76/SSL300	3	76	11.81	300	Box/Pin	2 3/8" API Reg	2" Z	2.62	67	15	7	51862506
SUB-BREG238PRD506-76/SSL145	3	76	5.72	145	Box/Pin	2 3/8" API Reg	RD 50-6	2.56	65	9	4	89009286
SUB-BREG238PREG238-76/SSL140	3	76	5.5	140	Box/Pin	2 3/8" API Reg	2 3/8" API Reg	2.56	65	9	4	89009288
SUB-BREG238PIF312-89/SSL356	3.5	89	14	356	Box/Pin	2 3/8" API Reg	3 1/2" IF	2.5	64	46	21	56938665
SUB-BREG238PREG238-89/SSL140	3.5	89	5.5	140	Box/Pin	2 3/8" API Reg	2 3/8" API Reg	2.56	65	13	6	89009496
SUB-BREG238PREG278-95/SSL130	3.75	95	5.13	130	Box/Pin	2 3/8" API Reg	2 7/8" API Reg	2.56	65	18	8	89009492
SUB-BREG238PREG238-102/SSL130	4	102	5.13	130	Box/Pin	2 3/8" API Reg	2 3/8" API Reg	3	76	17	7,8	89009097
SUB-BREG238PREG312-114/SSL120	4.5	114	4.72	120	Box/Pin	2 3/8" API Reg	3 1/2" API Reg	3.75	95	19	8,5	89009491
SUB-BREG278PREG238-189/SSL152	3.5	89	6	152	Box/Pin	2 7/8" API Reg	2 3/8" API Reg	2.56	65	14	6,5	89009011
SUB-BREG238PREG238-102/SSL229	4	102	9	229	Box/Pin	2 7/8" API Reg	2 7/8" API Reg	3.5	89	24	11	57155921
SUB-BREG238PIF312-102/SSL356	4	102	14	356	Box/Pin	2 7/8" API Reg	3 1/2" IF	3	76	55	25	56996317
SUB-BREG278PIF4-146/SSL483	5.75	146	19	483	Box/Pin	2 7/8" API Reg	4" IF	3.5	89	73	33	57085425
SUB-BREG278PIF4-152/SSL483	6	152	19	483	Box/Pin	2 7/8" API Reg	4" IF	3.5	89	123	56	57093163
SUB-BIF278PFH4-127/SSL483	5	127	19	483	Box/Pin	2 7/8" IF	4" FH	3.5	89	79	36	52215464
SUB-BIF278PFH4-127/SSL1067	5	127	42	1067	Box/Pin	2 7/8" IF	4" FH	3.5	89	183	83	57048514
SUB-BIF278PFH4-127/SSL1372	5	127	54	1372	Box/Pin	2 7/8" IF	4" FH	3.5	89	236	107	57233149
SUB-BIF278PFH4-140/SSL241	5.5	140	9.5	241	Box/Pin	2 7/8" IF	4" FH	3.5	89	53	24	57620544
SUB-BREG312PZ212-102/SSL340	4	102	13.38	340	Box/Pin	3 1/2" API Reg	2 1/2" Z	3	76	24	11	51788644
SUB-BREG312PREG278-102/SSL305	4	102	12	305	Box/Pin	3 1/2" API Reg	2 7/8" API Reg	3	76	32	14,5	56996663
SUB-BREG312PREG278-102/SSL229	4	102	9	229	Box/Pin	3 1/2" API Reg	2 7/8" API Reg	3.5	89	24	11	57155913

Box to Pin – Female to Male (continued)


Product code	Diameter (D1, D2)		Length ss (C)		Configuration			Flats across (F)		Weight		Compatibility
	inch	mm	inch	mm	Type	Box (A)	Pin (A)	inch	mm	lbs	kg	
SUB-BREG312PREG238-114/SSL219	4.5	114	8.62	219	Box/Pin	3 1/2" API Reg	2 3/8" API Reg	3.75	95	27.5	12.5	89009495
SUB-BREG312PREG238-114/SSL299	4.5	114	11.75	299	Box/Pin	3 1/2" API Reg	2 3/8" API Reg	3.75	95	35.7	16.2	89000860
SUB-BREG312PZ2-114/SSL254	4.5	114	10	254	Box/Pin	3 1/2" API Reg	2" Z	3.5	89	22	10	51031318
SUB-BREG312PREG278-114/SSL160	4.5	114	6.29	160	Box/Pin	3 1/2" API Reg	2 7/8" API Reg	3.75	95	16	7.5	89009051
SUB-BREG312PIF278-114/SSL160	4.5	114	6.29	160	Box/Pin	3 1/2" API Reg	2 7/8" IF	3.75	95	18	8	89009053
SUB-BREG312PREG312-114/SSL160	4.5	114	6.29	160	Box/Pin	3 1/2" API Reg	3 1/2" API Reg	3.75	95	18	8	89009494
SUB-BREG312PNC35-114/SSL160	4.5	114	6.29	160	Box/Pin	3 1/2" API Reg	API NC 35	3.75	95	22	10	89009052
SUB-BREG312PREG312-114/SSL229	4.5	114	9	229	Box/Pin	3 1/2" API Reg	3 1/2" API Reg	3.5	89	22	10	57155947
SUB-BREG312PREG312-114/SSL965	4.5	114	38	965	Box/Pin	3 1/2" API Reg	3 1/2" API Reg	3.5	89	141	64	57762940
SUB-BREG312PREG312-127/SSL299	5	127	9	229	Box/Pin	3 1/2" API Reg	3 1/2" API Reg	3.5	89	44	20	57187114
SUB-BREG312PREG312-127/SSL607	5	127	24	607	Box/Pin	3 1/2" API Reg	3 1/2" API Reg	3.5	89	134	61	57194078
SUB-BREG312PREG312-127/SSL914	5	127	36	914	Box/Pin	3 1/2" API Reg	3 1/2" API Reg	3.5	89	159	72	57194086
SUB-BREG312PBECO312-127/SSL299	5	127	9	229	Box/Pin	3 1/2" API Reg	3 1/2" BECO	3.5	89	44	20	57236895
SUB-BREG312PFH4-127/SSL483	5	127	19	483	Box/Pin	3 1/2" API Reg	4" FH	3.5	89	57	26	50217504
SUB-BREG312PFH4-127/SSL419	5	127	16.5	419	Box/Pin	3 1/2" API Reg	4" FH	3.5	89	55	25	52156734
SUB-BREG312PBECO312-140/SSL813	5.5	140	32	813	Box/Pin	3 1/2" API Reg	3 1/2" BECO	4.5	114	189	86	52249463
SUB-BREG312PREG412-146/SSL131	5.75	146	5.16	131	Box/Pin	3 1/2" API Reg	4 1/2" API Reg	4.71	120	36	16.5	89009099
SUB-BREG312PIF4-152/SSL483	6	152	19	483	Box/Pin	3 1/2" API Reg	4" IF	3.5	89	112	51	57032872
SUB-BBECO312PFH4-140/SSL483	5.5	140	19	483	Box/Pin	3 1/2" BECO	4" FH	4.5	114	73	33	52206992
SUB-BBECO312PIF4-152/SSL483	6	152	19	483	Box/Pin	3 1/2" BECO	4" IF	3.5	89	108	49	57294845
SUB-BBECO4PIF4-152/SSL483	6	152	19	483	Box/Pin	4" BECO	4" IF	4.5	114	121	55	57032955
SUB-BFH4PIF278-140/SSL607	5.5	140	24	607	Box/Pin	4" FH	2 7/8" IF	3.5	89	81	37	52215456
SUB-BREG412PREG312-114/SSL607	4.5	114	24	607	Box/Pin	4 1/2" API Reg	3 1/2" API Reg	3.5	89	79	36	50346881
SUB-BREG412PREG312-140/SSL229	5.5	140	9	229	Box/Pin	4 1/2" API Reg	3 1/2" API Reg	4.5	114	46	21	57142069
SUB-BREG412PBECO312-140/SSL914	5.5	140	36	914	Box/Pin	4 1/2" API Reg	3 1/2" BECO	4.5	114	216	98	57678625
SUB-BREG412PBECO312-140/SSL229	5.5	140	9	229	Box/Pin	4 1/2" API Reg	3 1/2" BECO	4.5	114	46	21	52206984
SUB-BREG412PBECO312-140/SSL607	5.5	140	24	607	Box/Pin	4 1/2" API Reg	3 1/2" BECO	4.5	114	139	63	57338477
SUB-BREG412PREG312-146/SSL235	5.75	146	9.25	235	Box/Pin	4 1/2" API Reg	3 1/2" API Reg	3.75	95	42	19	89009588

Box to Pin – Female to Male (NO spanner flats)

Product code	Diameter (D1, D2)		Length ss (C)		Configuration			Flats across (F)		Weight		Compatibility
	inch	mm	inch	mm	Type	Box (A)	Pin (B)	inch	mm	lbs	kg	
SUB-BREG238PREG238-89/SSL305	3.5	89	12	305	Box/Pin	2 3/8" API Reg	2 3/8" API Reg	n/a	n/a	28.6	13	89000644
SUB-BREG278PREG238-102/SSL305	4	102	12	305	Box/Pin	2 7/8" API Reg	2 3/8" API Reg	n/a	n/a	35.2	16	89000655
SUB-BREG312PREG312-114/SSL305	4.5	114	12	305	Box/Pin	3 1/2" API Reg	3 1/2" API Reg	n/a	n/a	46.2	21	89000702
SUB-BREG312PREG278-114/SSL305	4.5	114	12	305	Box/Pin	3 1/2" API Reg	2 7/8" API Reg	n/a	n/a	46.2	21	89000854
SUB-BREG312PREG312-127/SSL305	5	127	12	305	Box/Pin	3½" API Reg	3½" API Reg	n/a	n/a	60.1	27.3	89001339

Box to Pin – Female to Male (with Spanner Flats)

Product code	Diameter (D1, D2)		Length ss (C)		Configuration			Flats across (F)		Weight		Compatibility
	inch	mm	inch	mm	Type	Box (A)	Pin (B)	inch	mm	lbs	kg	
SUB-BREG238PREG238-76/SSL220	3	76	8.66	220	Box/Pin	2 3/8" API Reg	2 3/8" API Reg	2.56	65	14.7	6,7	89001326
SUB-BREG238PREG238-76/SSL580	3	76	22.83	580	Box/Pin	2 3/8" API Reg	2 3/8" API Reg	2.56	65	38.8	6,7	89001315
SUB-BREG238PREG238-89/SSL220	3.5	89	8.66	220	Box/Pin	2 3/8" API Reg	2 3/8" API Reg	2.56	65	20.5	9,3	89001327
SUB-BREG238PREG238-89/SSL580	3.5	89	22.83	580	Box/Pin	2 3/8" API Reg	2 3/8" API Reg	2.56	65	53.3	25,1	89001322
SUB-BREG278PREG238-102/SSL220	4	102	8.66	220	Box/Pin	2 7/8" API Reg	2 3/8" API Reg	2.95	75	26	11,8	89001328
SUB-BREG278PREG238102/SSL580	4	102	22.83	580	Box/Pin	2 7/8" API Reg	2 3/8" API Reg	2.95	75	72.5	32,9	89001323
SUB-BREG278PREG312-102/SSL220	4	102	8.66	220	Box/Pin	2 7/8" API Reg	3 1/2" API Reg	2.95	75	27.3	12,4	89001331
SUB-BREG278PREG312-102/SSL580	4	102	22.83	580	Box/Pin	2 7/8" API Reg	3 1/2" API Reg	2.95	75	69.4	31,5	89001325
SUB-BREG312PREG312-114/SSL220	4.5	114	8.66	220	Box/Pin	3 1/2" API Reg	3 1/2" API Reg	3.74	95	33.5	15,2	89001329
SUB-BREG312PREG312-114/SSL580	4.5	114	22.83	580	Box/Pin	3 1/2" API Reg	3 1/2" API Reg	3.74	95	89	40,4	89001320
SUB-BREG412PREG312-140/SSL220	5.5	140	8.66	220	Box/Pin	4 1/2" API Reg	3 1/2" API Reg	4.72	120	44	20	89001330
SUB-BREG412PREG312-140/SSL580	5.5	140	22.83	580	Box/Pin	4 1/2" API Reg	3 1/2" API Reg	4.72	120	131	59,4	89001324

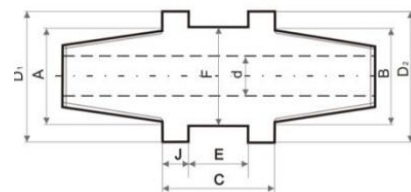

Pin to Pin – Male to Male

Product code	Diameter (D1, D2)		Length ss (C)		Configuration			Flats Across (F)		Weight		Compatibility
	inch	mm	inch	mm	Type	Pin (A)	Pin (B)	inch	mm	lbs	kg	
SUB-PRD506PREG238-76/SSL60	3	76	2.33	60	Pin/Pin	RD 50-6	2 3/8" API Reg	2.63	65	6.6	3	89009270
SUB-PRD506PREG238-76/SSL60	3	76	0.26	0,08	Pin/Pin	2 3/8 API Reg	RD 40-6	2.56	65	7.7	3,5	89010258
SUB-PRD506PREG238-76/SSL60	3.5	89	2.75	70	Pin/Pin	RD 70-4	2 3/8" API Reg	2.63	65	10	4,6	89009272
SUB-PRD506PREG238-76/SSL60	3.5	89	2.75	70	Pin/Pin	2 3/8" API Reg	2 3/8" API Reg	2.63	65	10	4,6	89009498
SUB-PRD506PREG238-76/SSL60	3.69	94	4	102	Pin/Pin	2 3/8" API Reg	2 3/8" API Reg	2.25	57	11	5	50984616
SUB-PRD506PREG238-76/SSL60	4.75	121	19.5	495	Pin/Pin	2 3/8" IF	3 1/2" IF			62	28	58040361
SUB-PRD506PREG238-76/SSL60	4.75	121	19.5	495	Pin/Pin	2 3/8" IF	3 1/2" IF			81	37	58036625
SUB-PRD506PREG238-76/SSL60	5	127	38	970	Pin/Pin	4" FH	3 1/2" IF	3.5	89	200	91	57611360