


HQL50 DTH HAMMER

HQL50. Hammers	Item Description	Weight (Kg)	Part Number
----------------	------------------	-------------	-------------

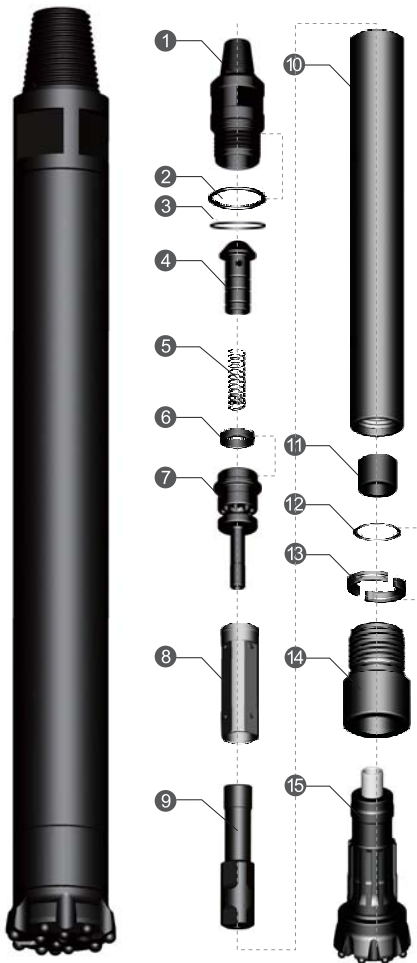

1	Top Sub	15.0	HQL50-TSUB
2	"O"Ring of Top Sub	0.015	HQL50-SR-TSUB
3	Breakout Ring of Top Sub	0.15	HQL50-BR-TSUB
4	Check Valve	1.00	HQL50-CVALVE
5	Spring	0.10	HQL50-SPRING
6	Compression Buffer	0.10	HQL50-CBUFFER
7	Air Distributor	3.50	HQL50-DIST
8	Internal Cylinder	4.20	HQL50-ICYL
9	Piston	19.0	HQL50-PISTON
10	External Cylinder	24.6	HQL50-ECYL
11	Guided Sleeve	0.90	HQL50-BUSH
12	"O"Ring of Stop Ring	0.01	HQL50-SR-SRING
13	Stop Ring	0.40	HQL50-SRING
14	Drive Chuck	4.60	HQL50-DCHUCK
15	Drill Bit		HQL50-135FF-TV

Technical Data

Length(Less bit)	Weigth(Less bit)	External Diameter	Bit Shank	Hole Range	Connection Thread
1156mm	73.0Kg	Φ125	Cop54-G QL50 HQL50	Φ140-Φ152	API 3 1/2 " REG
Box Size	Impact rate at 1.7Mpa	Recommended rotation speed	Air Consumption		
			250-350(PSI)		
1230x155x180mm	25HZ	20-35r/min	500-800(CFM)		